Altus Flush | 42

THE MODERN FAN CO
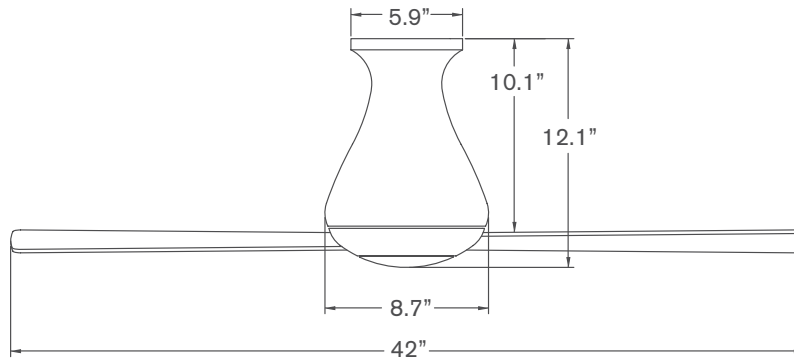
ETL LISTED INTERTEK US

Altus Flush | 42 > Configure item number from attributes below.

Finish		Blade Span		Blade Color		Light Option		Control Option	
#ALT–FM –		–		–		–		–	
	▲		▲		▲		▲		▲
GW	Gloss White	**42**	42" Span	**WH**	White	**NL**	No Light	**001**	Fan Speed Only
BA	Brushed Aluminum			**AL**	Aluminum	**271**	17W LED	**002**	Fan & Light – 3 Wire
								003	Handheld Remote
								004	Fan & Light – 2 Wire
								005	Wall/Remote Combo

Dimensions

5.9"

10.1"

12.1"

8.7"

42"

Also available in 52" blade span.

Specifications

– 153mm x 18mm AC motor with reverse switch on fan body
– Die cast aluminum construction
– 42" span, plywood blades
– Optional LED light: 17W, 90 CRI, 3000K, 1530 lumens (dimmable) behind an opal glass diffuser; adds 1.5" to length of fan; CA Title 24, JA8-2019 compliant
– For flat ceilings only
– Designed by Ron Rezek
– ETL listed for dry and damp locations
– Weight: 15 lbs (6.8 kgs)

Performance Data

LOWEST SPEED
RPM: 120
CFM: 1,647
Watts: 13.61
CFM/W: 121.01

HIGHEST SPEED
RPM: 265
CFM: 3,531
Watts: 58.11
CFM/W: 60.76

Energy Guide Data

Average Energy Use
37 Watts

Average Airflow
2,659 CFM

Yearly Energy Cost
$10

Average Efficiency
71 CFM/Watt

* Energy Guide Data represents weighted averages of low speed and high speed performance, assuming typical use (excluding light). For more information, visit www.modernfan.com.

Altus Flush | 42

Gloss White with
White Blades
(no light)

Gloss White
with White Blades
and 271 LED Light

Brushed Aluminum
with Aluminum
Blades and 271
LED Light

## FAN FINISHES

Gloss
White

Brushed
Aluminum

PLYWOOD BLADES

Plywood blades are constructed of furniture grade veneers, painted or stained
as shown here. Natural variations may exist in woodgrains and finishes.

White

Aluminum

ALTUS FLUSH FAN CONTROLS

Selection of a control option is made at time of order and incorporated into the fan item
number (except #FC-009A and #FC-009B which are sold as accessory items).

**#FC-001
Fan Speed Only Control**
(no light)

For a single AC fan, providing
four speeds. Not intended for
a fan with light. *Note: Not com-
patible with remote control.*

**#FC-002
Fan & Light Control—3 Wire**

For a single AC fan with LED light,
providing four speeds and dimming
function. Requires three wires from
switch location to fan. *Note: Not
compatible with remote control.*

**#FC-003-LED
Handheld Remote RF Control**

Designed for independent operation
a single AC fan or AC fan with LED
light, providing three speeds and full
range dimming (or "on/off" switching),
using only one circuit (two wires).
Includes RF handset, receiver, battery
and comes with a wall mounting
bracket for handset.

**#FC-004-LED Fan & Light
RF Control—2 Wire**

Designed for independent opera-
tion of a single AC fan or AC fan
with LED light, providing three
speeds and full range dimming
(or "on/off" switching), using only
one circuit (two wires). Includes
RF wall control (with master power
switch), switch plate and receiver.

**#FC-005-LED
Wall/Remote Combo
RF Control—2 Wire**

Designed for independent
operation of a single AC fan
or AC fan with LED light,
providing three speeds and
full range dimming (or "on/
off" switching), using only one
circuit (two wires). Includes
RF handset, RF wall control
(with master power switch),
switch plate and receiver.

**#FC-009A / #FC-009B
Multi-fan Speed Controls
for AC Fans**
(no lights)

Sold as an accessory item,
providing three speeds for multiple
AC fans on a single switch leg.
FC-009A for 2-3 fans
FC-009B for 3-6 fans
*Note: Not compatible with remote
control. Control of fan lights
must be accounted for separately
with owner provided control on
separate switch leg.*

MOUNTING

The Altus Flush installs with a flat
mounting plate (included) for attachment to
an appropriately rated junction box.

The Altus Flush is intended for flat,
low ceilings (approximately 8'0").
For higher ceilings and/or for sloped
ceilings, please select from one of our
down rod suspended models.